

Series TU2



AVENTICS™ Series TU2



Duo plastic tubing, Series TU2-S-PUR

- suitable for dynamic laying, Continuously bonded
- Ø 4-10 mm
- Polyester polyurethane
- Max. working pressure at 20 °C 10 bar



Max. working pressure at 20 °C 10 bar
 Ambient temperature min./max. -30 ... 80 °C
 Weight See table below

Technical data

Part No.	external	Wall thickness	Color	Length	Bending radius min.
	-Ø			Delivery unit	At 20 °C
1820712070	4 mm	0.75 mm	Blue-black	25 m	12 mm
R412014515	4 mm	0.75 mm	Blue-black	100 m	12 mm
R414010613	4 mm	0.75 mm	Black, transparent	100 m	12 mm
1820712072	6 mm	1.05 mm	Blue-black	25 m	18 mm
R412014516	6 mm	1.05 mm	Blue-black	100 m	18 mm
1820712073	8 mm	1.15 mm	Blue-black	25 m	30 mm
R412014486	8 mm	1.15 mm	Blue-black	100 m	30 mm
1820712074	10 mm	1.25 mm	Blue-black	25 m	45 mm
R412014517	10 mm	1.25 mm	Blue-black	100 m	45 mm

Part No.	Weight per meter
1820712070	0.018 kg
R412014515	0.018 kg
R414010613	-
1820712072	0.04 kg
R412014516	0.04 kg
1820712073	0.06 kg
R412014486	0.06 kg
1820712074	0.084 kg
R412014517	0.084 kg

price / m

Technical information


Halogen-free
Suitable for dynamic laying

Technical information

Material	
Material	Polyester polyurethane

Duo plastic tubing, Series TU2-S-PUR

- Partially bonded
- Ø 4 mm
- Polyester polyurethane
- Max. working pressure at 20 °C 10 bar

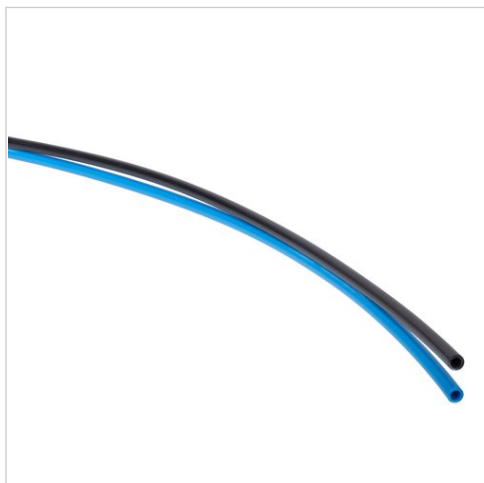

Max. working pressure at 20 °C	10 bar
Ambient temperature min./max.	-30 ... 80 °C
Weight	0.018 kg

Technical data

Part No.	external	Wall thickness	Color	Length	Bending radius min.
	-Ø			Delivery unit	At 20 °C
R412026222	4 mm	0.75 mm	Blue-black	100 m	12 mm
R414010294	4 mm	0.75 mm	Black, transparent	100 m	12 mm

price / m

Technical information

Halogen-free
Suitable for dynamic laying

Technical information

Material

Material	Polyester polyurethane
----------	------------------------

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2017 Emerson Electric Co. All rights reserved.
2019-03



CONSIDER IT SOLVED™



青岛秉诚自动化设备有限公司
地址：中国·青岛市重庆南路99号海尔云街甲3号楼7F

服务热线：4006-918-365
网址：<http://www.ivalve.cc>

传真：(86-532)585-10-365
Email：sales@bechinas.com